




DHM-60X10/FS-455W
DHM-60X10/FS-460W

Full Screen

No Dust and Dirt on the Surface Increase Power Generation

Quality Guarantee

- 25-year → Material & technology warranty
- 25-year → Linear power output warranty

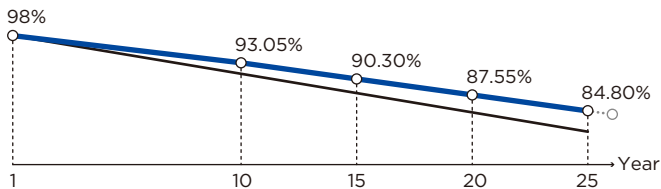

- DAH Solar Linear power output guarantee
- Standard Linear power output guarantee

*Subject to the terms and conditions contained in the applicable Warranty Statement. Also this 25-year limited product warranty is available only for products installed and operating on residential rooftops in Australia.



IEC 61215 / IEC 61730 / CE / FIDE / INMETRO
ISO 45001: 2018/International standards for occupational health & safety
ISO 14001: 2015/Standards for environmental management system
ISO 9001: 2015/Quality management system



Increase power generation by 6.15%+
Panel is capable to decrease power generation loss caused by Dust, reduce the hot spot risk.



Curved Surface 128° R Angle
Reduce holding pressure by 75%+
Curved Frame with ergonomic Design, optimized Delivery and Installation Experience.



Revolutionary Assembling Technology
Using excellent frame assembling technology,
Strong Adhesion, Durable in Use.

Fire safety class:

Class C according to ANSI/UL 1703-2018(as per ANSI/UL 790-2018)

DHM-60X10/FS

455~460W




Mechanical Specification

Cable	4.0mm ² , 300/400mm in length,
(Including connector)	length can be customized
No.of Cells	120 (6×20)
Glass	3.2mm High Transmission, Antireflection Coating
Junction box	IP68, 3 Bypass Diodes
Connector	PV5e, Changshu Friends Connector Technology Co.,Ltd, Customized Connectors
Weight	23.8kg
Cells Type	Mono 182×91mm
Dimension (L×W×T)	1903×1134×32mm
Packing	34pcs/pallet, 816pcs/40HQ

Operating Parameters

Maximum system voltage	1500V DC
Operating Temperature	-40 ~ +85°C
Maximum series fuse rating	25A
Snow load, frontside/Wind load, backside	5400Pa/2400Pa
Nominal operating cell temperature	45°C±2°C
Application level	Class A

Design

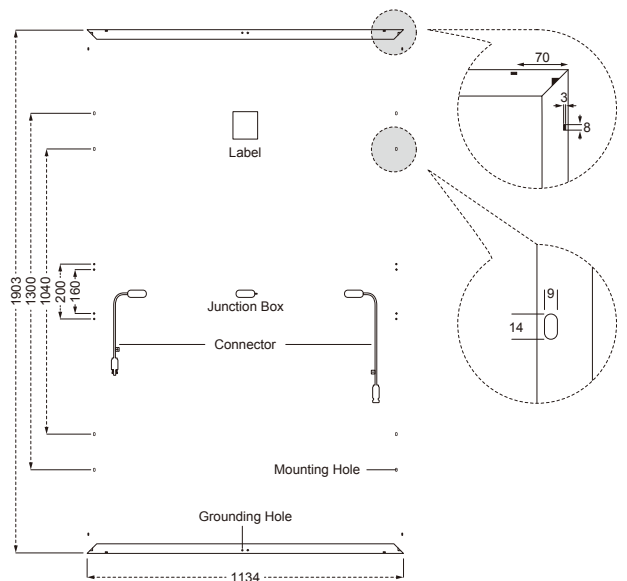

STC — Electrical Characteristics

Module Type	DHM-60X10/FS-455W	DHM-60X10/FS-460W
Maximum Power (Pmax/W)	455	460
Open-circuit Voltage (Voc/V)	41.8	42.0
Maximum Power Voltage (Vmp/V)	35.4	35.6
Short-circuit Current (Isc/A)	13.72	13.78
Maximum Power Current (Imp/A)	12.85	12.92
Module Efficiency (%)	21.08	21.32

Power Tolerance: 0~+5W, Temperature Coefficient of Isc: 0.05%/°C, Temperature Coefficient of Voc: -0.31%/°C, Temperature Coefficient of Pmax: -0.35%/°C

Standard Test Environment : Irradiance 1000W/m², Cell temperature 25°C, Spectrum AM1.5 Tolerances: Pmax=±3%, Voc=±3%, Isc=±3%

NOCT — Electrical Characteristics

Maximum Power (Pmax/W)	342	346
Open-circuit Voltage (Voc/V)	39.6	39.7
Maximum Power Voltage (Vmp/V)	33.5	33.7
Short-circuit Current (Isc/A)	11.07	11.12
Maximum Power Current (Imp/A)	10.21	10.26

Standard Test Environment : Irradiance 800W/m², Ambient temperature 20°C, Spectrum AM1.5, Wind speed 1m/s

I-V Curve DHM-60X10/FS-450W

